

ROCK DRILLS - 15KG



Vibration Control

A selection of our tools are fully equipped with a range of vibration reducing design features for smoother operation and greater comfort. By selecting a vibration controlled option, you not only decrease any potential health risks to your tool operators, but you could also massively increase your productivity levels. The vibration control feature increases the length of time the tool can be used before current ELV & EAV levels are reached.

TJ-15SV LBS


- 15kg Class Rotary Rock Drill
- 22 x 108mm Hex Shank
- Vibration control from damping handles
- Suitable for quarry rock drilling applications
- Ergonomic & well balanced design
- Integrated noise muffler for operator comfort
- Up to 2,450 Blows per minute

Type	TJ-15SV LBS
Brand	TOKU
Shank size mm	Hex 22 x 108
Bore diameter mm	54
Stroke mm	45
Blows p/min	2,450
RPM	250
J/Blow	44.7
Air cons. l/s	26
Weight kg	17.7
Inlet thread	PT 3/4"
Hose diameter mm	19
Vibration m/s ²	7.0
Noise level dB(A)	99



TECHNICAL DATA

Type	A mm	B mm
TJ-15SV LBS	468	340

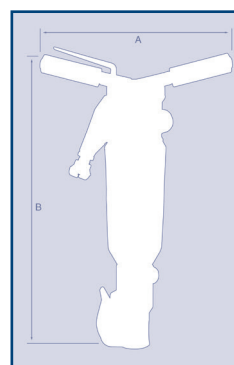

ELV - Daily Exposure Limit Value

EAV - Daily Exposure Action Value

Product Code	Time to reach ELV (hours:minutes)	Time to reach EAV (hours:minutes)
TJ-15SV LBS	4.05	1.01



REPAIR & SERVICE DEPARTMENT

From the Yokota UK service centre at our Sheffield head office we are able to offer you full service, repair & preventative maintenance.

- FREE no obligation quotations
- 3 month comprehensive warranty on all work carried out
- Fully traceable repair history through our quality management systems
- Only OEM spare parts used
- Complete maintenance advice service